


EVO5

535-555W


Bifacial Dual Glass Monocrystalline Module

Quality Guarantee

12-Year Warranty for Materials and Processing
30-Year Warranty for Extra Linear Power Output

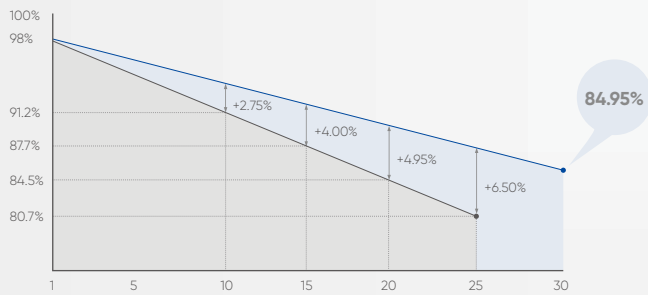

* Please refer to SunEvo standard warranty for details

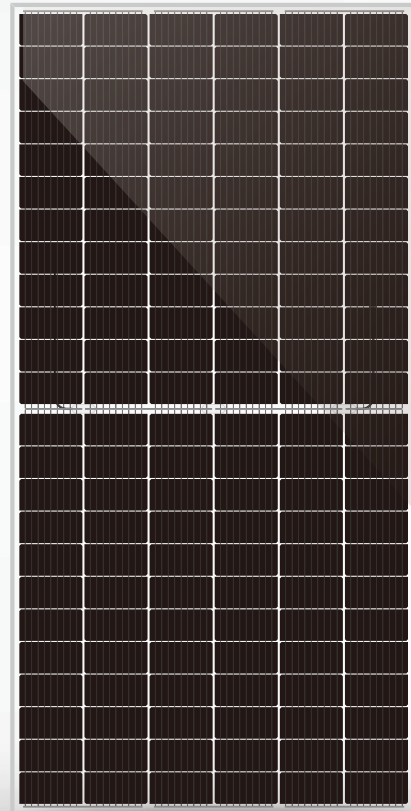

SE5-72HBD

High Power up to 555W

Large area cells based on 182mm silicon wafers,
High module efficiency with high density interconnect technology

High Energy Yield

Excellent low irradiation performance,
Up to 25% additional power gain from back side

High Reliability

Resistant to harsh environments such as salt, ammonia, sand,
high temperature and high humidity areas

High Customer Value

Lowest guaranteed first year and annual degradation,
Compatible with existing mainstream system components

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO 9001: 2015: ISO Quality Management System

ISO 14001: 2015: ISO Environment Management System

ISO 45001: 2018: Occupational Health and Safety





Mechanical Data

Number of Cells	144 Cells (6x24)
Dimensions of Module L*W*H	2279 x 1134 x 35mm
Weight	32.6kg
Front Side Glass	High transparency solar glass 2.0mm
Back Side Glass	High transparency solar glass 2.0mm
Frame	Black/Silver, anodized aluminium alloy
Junction Box	IP68 Rated, 3 Diodes
Cable	4.0mm ² , Portrait: 300mm / Landscape: 1400mm
Wind/Snow Load	2400Pa/5400Pa*
Connector	MC Compatible
Bifaciality	70±5%

* Please check the installation manual for more details

Module Dimension

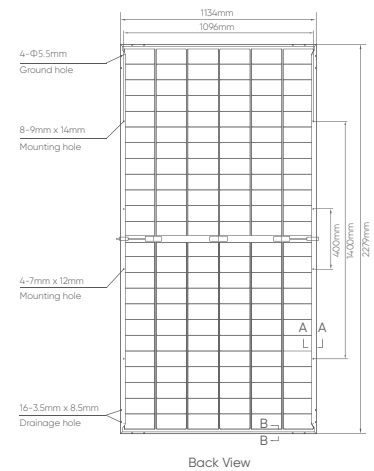

Electrical Specification (STC*)

	535	540	545	550	555
Maximum Power (Pmax/W)	535	540	545	550	555
Maximum Power Voltage (Vmp/V)	41.22	41.45	41.70	41.93	42.18
Maximum Power Current (Imp/A)	12.98	13.03	13.07	13.12	13.16
Open Circuit Voltage (Voc/V)	48.96	49.24	49.52	49.80	50.08
Short Circuit Current (Isc/A)	13.73	13.78	13.83	13.88	13.93
Module Efficiency (%)	20.9	21.1	21.3	21.5	21.7
Power Output Tolerance (W)	0~+5				

* Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Electrical Specification (NMOT*)

	404.8	408.6	412.4	416.2	420.0
Maximum Power (Pmax / W)	404.8	408.6	412.4	416.2	420.0
Maximum Power Voltage (Vmp / V)	38.23	38.45	38.67	38.90	39.12
Maximum Power Current (Imp / A)	10.58	10.62	10.66	10.70	10.74
Open Circuit Voltage (VOC / V)	46.21	46.48	46.74	47.01	47.28
Short Circuit Current (Isc / A)	11.00	11.04	11.08	11.12	11.16

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	30A


Packaging Configuration

Module per Box	31 pieces
Module per 40' Container	620 pieces

Temperature Ratings

NMOT (Nominal Module Operating Temperature)	42±2°C
Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Pmax	-0.35%/°C

I-V Curve at Different Temperature (555W)

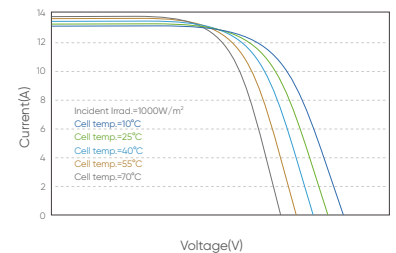

I-V/P-V Curve at Different Temperature (555W)

